


Looking ahead,
going beyond expectations
Ahead > Beyond



Borehole Pumps

Product Catalogue

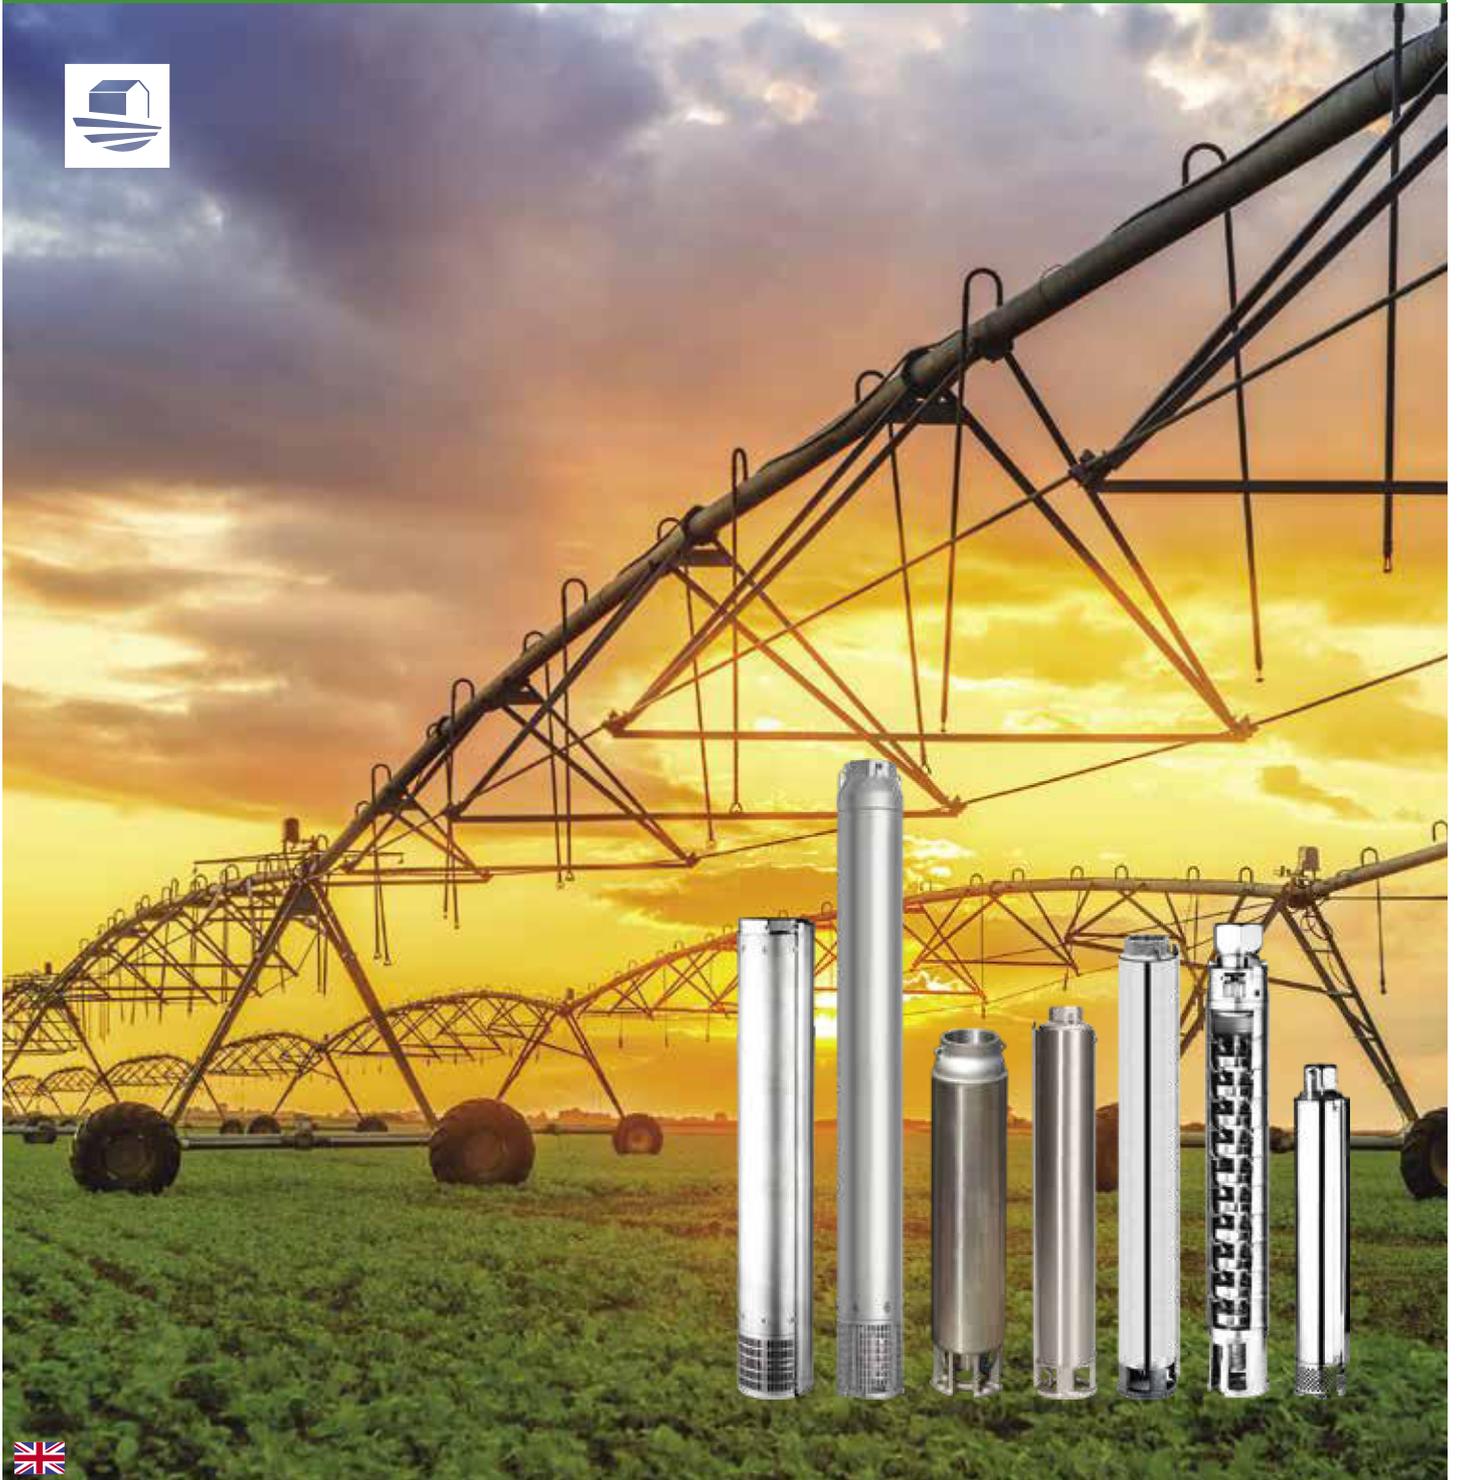



www.ebara-europe.com

Looking ahead,
going beyond expectations
Ahead > Beyond

Reliable, versatile, efficient.

The wide range of **borehole pumps** from 3" to 8" ensures high performance and ease of use.

From lifting, distribution and pressurisation of industrial systems to fire-fighting groups, from HVAC applications to fountains and the movement of clear water from wells and cisterns, our submersible pumps guarantee reliability, high resistance to corrosion and high efficiency thanks to special technical and constructive solutions.

The possibility of choice between different **motors** and **electrical panels** makes the range versatile and flexible to suit different types of use.

The efficiency and reliability of the pumps is enhanced by the ability to use inverter technology systems, including *E-SPD* and *E-drive*, for energy and cost savings of the entire system and an improvement of environmental sustainability.



Sectors and Areas of Application



Water movement

For the movement of clear water from wells in residential and domestic uses and to ensure the correct level of comfort



Pressurisation

For the pressurisation of water in residential, commercial, industrial and agricultural areas ensuring an efficient water supply



Irrigation

To make available the water necessary for crops



Fire-fighting

For the creation of fire-fighting groups compliant with the European standard UNI EN 12845



Washing

For the creation of washing systems used in industry



Water supply

For the supply of clear water in domestic, agricultural and industrial applications



Water treatment

For use in water treatment plants, such as reverse osmosis



Cooling systems

To ensure the circulation of water in domestic and industrial cooling processes



Fountains

For the efficient circulation of process water ensuring the required performance




Ease of installation

Simplicity, flexibility, easy maintenance.

They are all features that make the difference and are important for the installation of a pump. EBARA submersible electric pumps include: simple design, high quality components optimised for the best performance, the possibility of performing quick, easy maintenance without the need for special equipment, flexibility of choice between 3", 4", 6" and 8" motors, with the adapter joint that allows the combination of the pump body and motor most suited to requirements and a wide selection of accessories to complete the functionality of our submersible pumps.

With these characteristics, the installation of EBARA pumps is quick, simple, accessible to all, and makes these pumps ideal for every application.

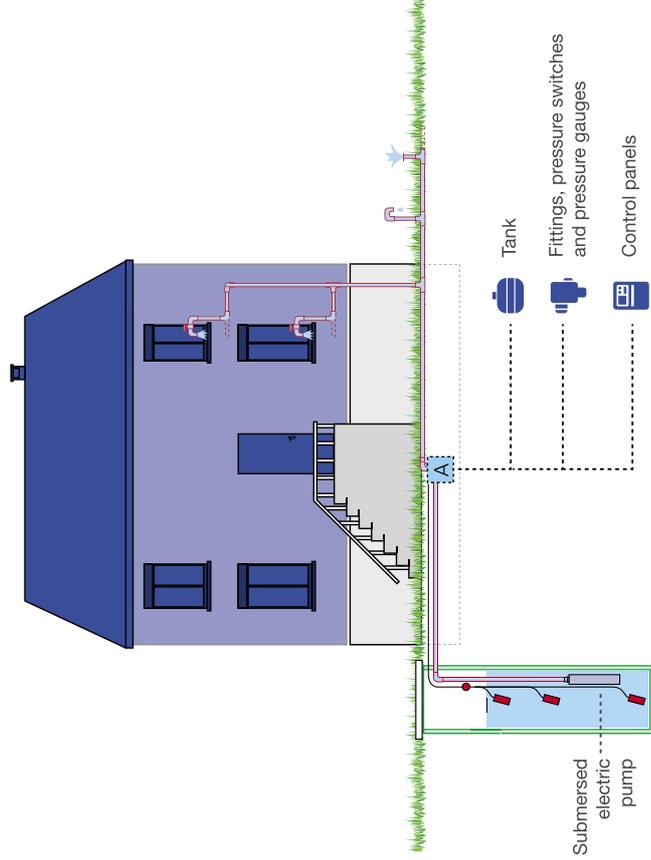

Discharge

The discharge casing of the different models is designed to reduce leaks, to increase resistance and to offer convenient securing to the supply pipe

Non-return valve

The non-return valve is designed to discharge the weight of the water column and allows the damping of any overpressure introduced into the system

External casing

The cooling casing is made of AISI 304 stainless steel. They have particular technical features that ensure perfect alignment of the components

Impeller

The impellers ensure our pumps a high volumetric efficiency and are designed to support axial thrust avoiding resting on the motor shaft. Made of different materials, they are designed to reduce friction, have high resistance to erosion and a long life

Motor joint

The motor joints comply with NEMA standards and the supports are designed to ensure the best possible resistance





Bespoke for everyone.

Wells for small domestic applications or for watering the garden. Large and deep wells with requests for large flow rates for the pressurisation of residential buildings, fire-fighting groups or industrial applications.

EBARA includes within the range of its submersible pumps **different types** of products, which differ in **diameter, materials** used and **performance** range.

SB3, the smallest with a diameter of 3", combines the advantages of the AISI 304 stainless steel components with the advantages of technopolymer hydraulics, followed by 4" WINNER 4N, 4WN and 4BHS. The **WINNER 4N** and the **4WN** have stainless steel components and technopolymer impellers while the **4BHS** is made **entirely of stainless steel**. The range also includes **IDROGO**, 5" electric pump. It has an external casing, filter and closing ring in AISI 304 stainless steel, while the impeller and diffuser are in polypropylene and polystyrene (PPE + PS). Then there are **SF6** and **6BHE** which are 6" electric pumps. The first has a stainless steel outer casing and PPO impellers reinforced with glass fibres, the second is **entirely in AISI 304 stainless steel** and is also available in **AISI 316** (6BHEL).

The product series is completed by the **8BHE**, an 8" submersible electric pump, also **completely in AISI 304 stainless steel** and also in the **AISI 316** (8BHEL) version.

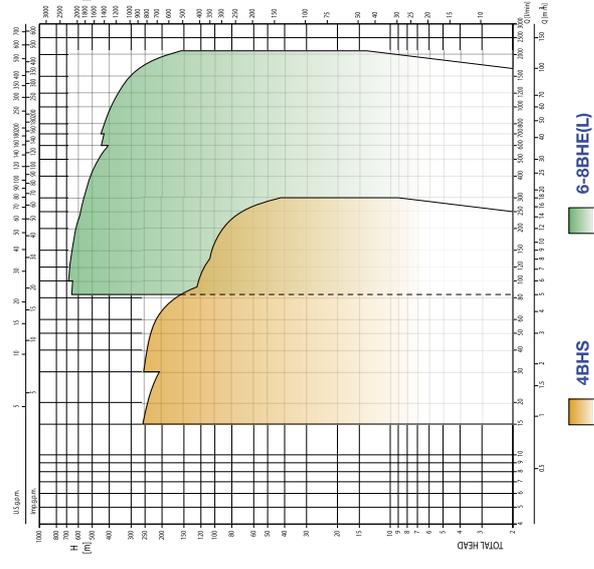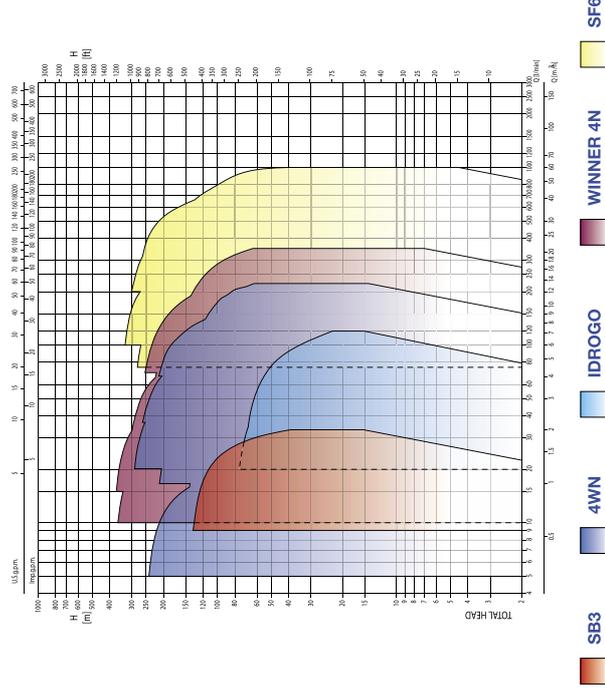

SB3

3" submersible centrifugal pump


Casing, discharge casing and motor joint are in AISI 304. Polyacetal resin POM diffuser. Impeller in PPO, glass fibre reinforced polymer. Especially recommended for the movement of clean water for agricultural use, industrial use and for the irrigation and pumping of water in general.




Suitable for horizontal operation



Silent

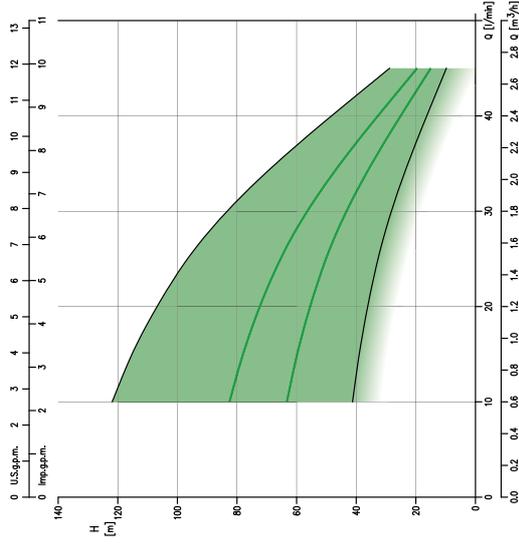

- Total head from 9.8 to 122 m
- Capacity from 0.6 to 2.7 m³/h
- Maximum immersion 60 m
- Maximum liquid temperature 30°C
- Maximum sand content 50 ppm

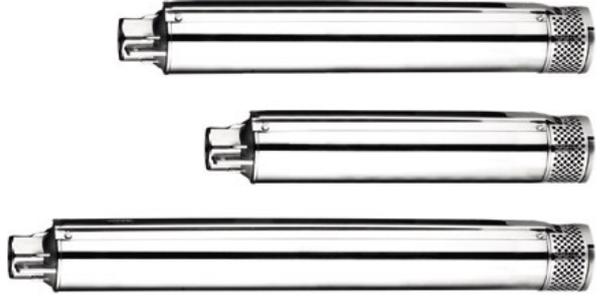

WINNER 4N

4" submersible centrifugal pump

4" submersible centrifugal electric pump in AISI 304 with floating impellers with frontal shim. Outer casing, shaft and valve are in AISI 304. Discharge casing in EN 1.4308 (ASTM CF8). The impeller is in Ixet® (glass fibre reinforced thermoplastic) for 4N1 - 4N2 - 4N4 - 4N7 models, in glass fibre reinforced polycarbonate for 4N10 - 4N15 models, PPE+PS diffuser reinforced with glass fibres. Particularly recommended for the movement of clear water in wells, the pressurisation of clean water for agricultural, domestic or industrial use, or for the irrigation and movement of water in general.




Suitable for horizontal operation




High resistance to corrosion



Easy installation

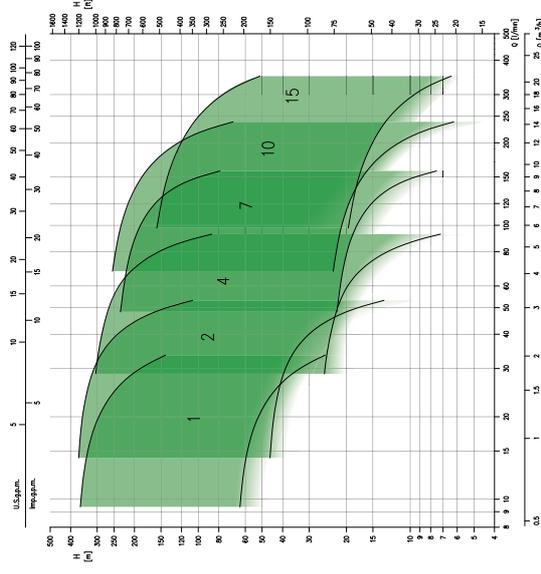

- Total head from 6.2 to 367 m
- Capacity from 0.6 to 21 m³/h
- Maximum immersion:
 - 350 m (water filled motor)
 - 150 m (oil filled motor)
- Maximum liquid temperature 40°C
- Maximum sand content 50 ppm
- Maximum chlorine content 500 ppm
- MEI > 0.4

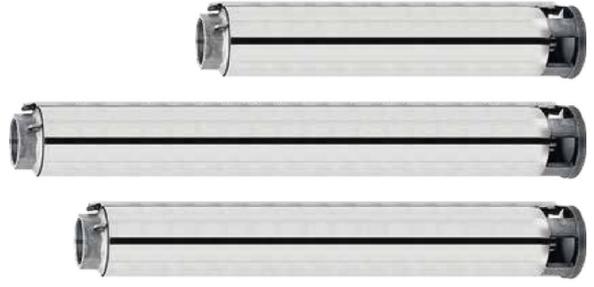

4WN

4" submersible centrifugal pump

4" submersible centrifugal electric pump in AISI 304 with a thick outer stainless steel casing, the discharge casing and the lower support are made of micro-cast stainless steel, the stainless steel non-return valve, as well as the stages, the pump shaft, the coupling joint and the stainless steel filter grid. Floating Noryl impellers and glass fibre reinforced polycarbonate diffusers. Motor coupling in accordance with the NEMA standards.


Particularly recommended for the movement of clear water in wells, the pressurisation of clean water for agricultural, domestic or industrial use, or for the irrigation and movement of water in general.



High resistance to corrosion



Easy installation

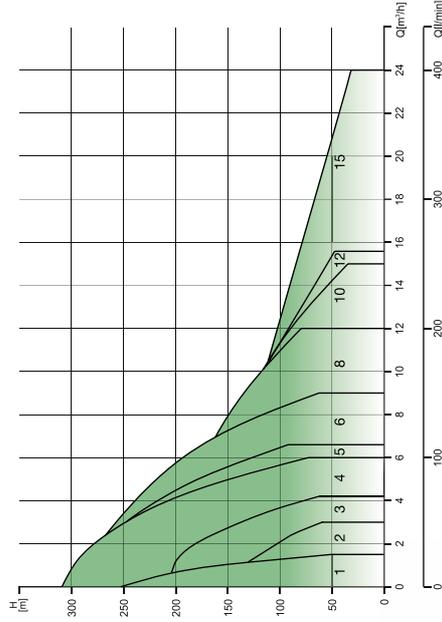

- Total head from 3 to 289 m
- Capacity from 0.3 to 24 m³/h
- Maximum immersion 150 m
- Maximum liquid temperature 35°C
- Maximum sand content 50 gr/m³
- MEI > 0.4 (from 4WN1 to 4WN5)



4BHS

4" submersible centrifugal pump

4" submersible centrifugal electric pump made entirely of AISI 304 stainless steel. Suitable for coupling with NEMA-compliant motors.


The discharge casing and the motor support are made of molded stainless steel. Support, openings, joint, impeller, diffuser, valve, stages, tie rods and cable cover in EN 1.4301 (AISI 304). The shim ring in EN 1.4301 (AISI 304) + EPDM while the shaft in EN 1.4401 (AISI 316). Radial bearings, axial bearings and thrust bearing are made of tungsten carbide. Suitable for domestic, agricultural and industrial water supply systems, pressurisation systems, for fire-fighting, irrigation, washing for and clear water movement in general.




High resistance to corrosion



Easy installation

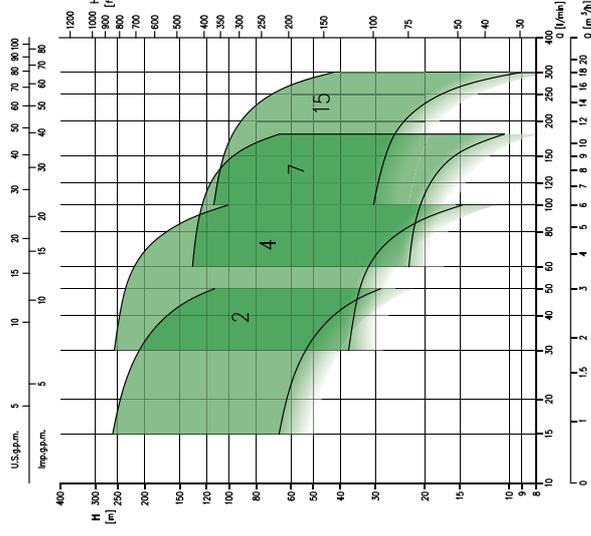

- Total head from 9.1 to 260 m
- Capacity from 0.9 to 18 m³/h
- Maximum immersion 350 m (water filled motor) 150 m (oil filled motor)
- Maximum liquid temperature 30°C
- Maximum sand content 50 ppm
- Maximum chlorine content 500 ppm
- MEI > 0.4 (only for 4BHS 2 - 4 - 7)

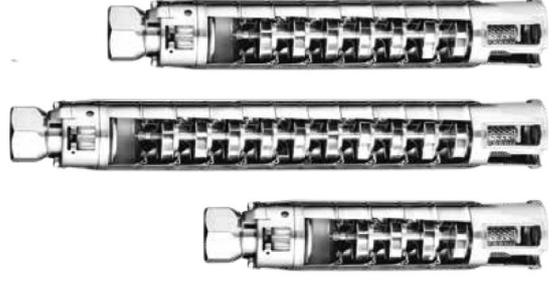


IDROGO

5" submersible centrifugal pump

External casing, motor cover, seal housing disc, filter and closing ring in AISI 304 impeller, diffuser and spacer in PPE+PS reinforced with fibreglass and shaft in AISI 431. Upper mechanical seal (motor side) in Carbon/Ceramic/NBR while the lower one (pump side) in SiC/Carbon/NBR. Movement of clean water from wells, cisterns and tanks, the pressurisation of domestic systems, small irrigation, the washing of vehicles and increases in pressure in general.



Suitable for horizontal operation

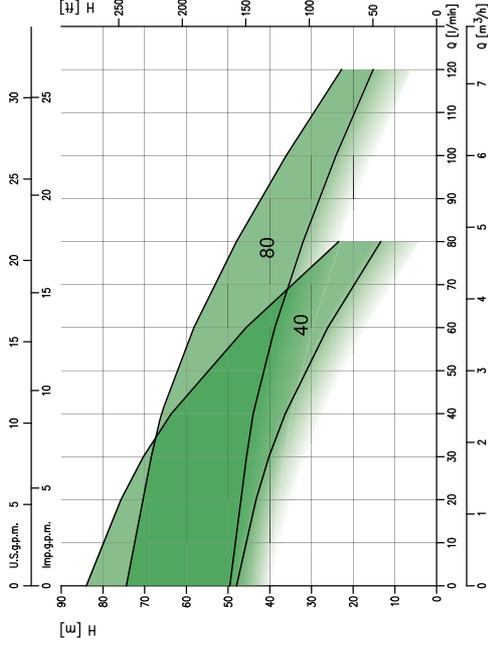

- Total head from 10.3 to 75.7 m
- Capacity from 1.2 to 7.2 m³/h
- Maximum liquid temperature 40°C
- Maximum solid size passage 2.5 mm



Impeller, diffuser and spacer in PPE+PS reinforced with fibreglass



SF6

6" submersible centrifugal pump


Discharge and suction casing in AISI 304. Outer casing, spacers, shim rings, non-return valve, cable protection and suction grid in AISI 304. The impellers and diffusers in PPO reinforced with glass fibres. The shaft is in AISI 420. Suitable for water supply systems for civil and industrial use, for pressurisation systems, for irrigation, aqueducts for communities.



High resistance to corrosion



Light and easy to transport

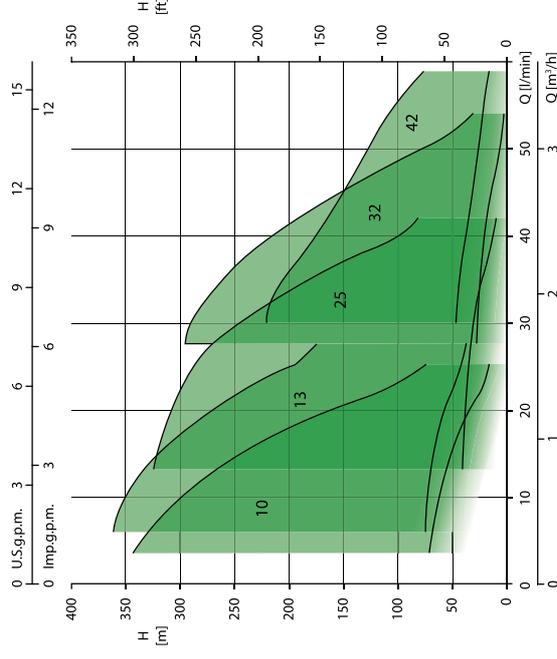

- Total head from 4 to 362 m
- Capacity from 3 to 66 m³/h
- Maximum liquid temperature 30°C
- Maximum sand content 50 ppm
- MEI > 0.4 for SF6 R10 - R13



6BHE(L)

6" submersible centrifugal pump


6" submersible pump, stainless steel (AISI 316 (6BHE) and (6BHEL), for deep wells. Discharge casing, impeller, stages, support and diffuser are in AISI 304 or AISI 316 depending on the model. The shaft is in AISI 431 for 6BHE and AISI 316 + AISI 329 for 6BHEL. They can be used for water supply from deep wells, for water distribution and pressurisation, irrigation systems, water treatment, filtering and reverse osmosis, industrial cooling systems, fountains and fire-fighting systems.



Suitable for horizontal operation



High resistance to corrosion

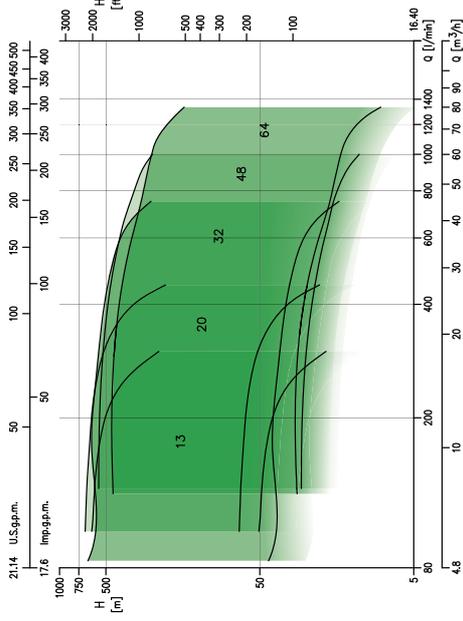

- Total head from 11.3 to 682 m
- Capacity from 5 to 75 m³/h
- Maximum immersion: 350 m (water filled motor) 150 m (oil filled motor)
- Maximum liquid temperature 60°C
- Maximum sand content 100 gr/m³
- MEI > 0.4 (for all models except 6BHE (L) 13)



8BHE(L)

8" submersible centrifugal pump


8" submersible centrifugal electric pump, for semi-axial flow deep wells, in stainless steel AISI 304 (8BHE) or AISI 316 (8BHEL). Developed specifically for high flow pumping needs. Discharge casing, stages and support in AISI 304 or AISI 316 depending on the model. The shaft is in AISI 329 and the impeller in AISI 316. They can be used for water supply from deep wells, for water distribution and pressurisation, irrigation systems, water treatment, filtering and reverse osmosis, industrial cooling systems, fountains and fire-fighting systems.



Suitable for horizontal operation



High resistance to corrosion

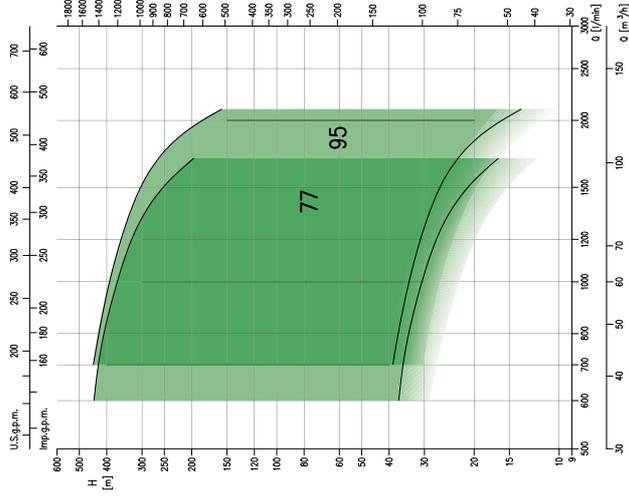

- Total head from 13.6 to 446 m
- Capacity from 36 to 126 m³/h
- Maximum immersion: 350 m (water filled motor) 150 m (oil filled motor)
- Maximum liquid temperature 60°C
- Maximum sand content 100 gr/m³



Submersed motors

Single phase and three phase, oil filled motor and water filled motor versions

The different availability of electric motors combined with submersible pumps widen the range of pump performance, thus providing the possibility of having the best possible performance in terms of flow rate, prevalence and energy efficiency.



High resistance to corrosion



Available in AISI 316

MAIN FEATURES

The 3", 4", 6" and 8" motors make it possible to find the right combination of hydraulic performance and electrical efficiency.

The choice is between **oil filled motors** or **water filled motors**, both available in **AISI 304** stainless steel and in **AISI 316**.

The NEMA-compliant connections ensure flexibility and ease of use.



Cable sizing

Oil filled motors 3"

Example: Motor 0.75 kW - 230V single phase - cable length 75 m = 4x2.5 mm²

Motor	HP	kW	Cable type											
			3x1.5	3x2.5	3x4	3x6	4x1	4x1.5	4x2.5	4x4	4x6			
Type 3" Single phase 230V	0.5	0.37	-	-	-	-	50	75	125	-	-	-	-	-
	0.75	0.55	-	-	-	-	38	57	95	152	-	-	-	-
	0.8	0.6	70	120	180	270	-	-	-	-	-	-	-	-
	1	0.75	-	-	-	-	30	45	75	120	174	-	-	-
	1.2	0.9	60	85	125	190	-	-	-	-	-	-	-	-
2.0	1.5	55	75	90	140	-	-	-	-	-	-	-	-	
Type 3" Three phase 400V	0.5	0.37	-	-	-	-	240	-	-	-	-	-	-	-
	0.75	0.55	-	-	-	-	164	246	-	-	-	-	-	-
	1	0.75	-	-	-	-	133	200	233	-	-	-	-	-
1.5	1.1	-	-	-	-	97	146	244	390	-	-	-	-	

Oil filled motors 4" - 6"

Example: Motor 1.1 kW - 230V single phase - cable length 53 m = 4x2.5 mm²

Motor	HP	kW	Cable type											
			4x1	4x1.5	4x2.5	4x4	4x6	4x10	4x16	4x25	4x35			
Type 4" Single phase 230V	0.5	0.37	50	75	125	-	-	-	-	-	-	-	-	-
	0.75	0.55	38	57	95	162	-	-	-	-	-	-	-	-
	1	0.75	30	45	75	120	174	-	-	-	-	-	-	-
	1.5	1.1	22	33	53	85	127	210	-	-	-	-	-	-
	2	1.5	-	23	38	63	92	154	246	-	-	-	-	-
	3	2.2	-	-	28	45	67	112	180	-	-	-	-	-
Type 4" Three phase 400V	0.5	0.37	240	-	-	-	-	-	-	-	-	-	-	-
	0.75	0.55	164	246	-	-	-	-	-	-	-	-	-	-
	1	0.75	133	200	333	-	-	-	-	-	-	-	-	-
	1.5	1.1	97	146	244	390	-	-	-	-	-	-	-	-
	2	1.5	72	109	180	290	435	-	-	-	-	-	-	-
	3	2.2	51	78	130	207	310	516	-	-	-	-	-	-
Type 6" Three phase 400V	4	3	41	62	104	167	250	416	-	-	-	-	-	-
	5.5	4	31	46	77	124	186	310	496	-	-	-	-	-
	7.5	5.5	90	135	225	360	540	810	1215	-	-	-	-	-
	10	7.5	-	33	56	90	135	225	360	540	-	-	-	-
	10	7.5	-	-	66	100	165	270	-	-	-	-	-	-
	5.5	4	-	-	110	160	250	400	-	-	-	-	-	-
7.5	5.5	-	-	88	108	161	265	415	-	-	-	-	-	
10	7.5	-	-	53	84	126	207	325	-	-	-	-	-	
12.5	9.2	-	-	44	70	104	171	267	413	-	-	-	-	
15	11	-	-	-	59	87	144	223	347	548	-	-	-	
20	15	-	-	-	-	65	107	167	258	350	-	-	-	
25	18.5	-	-	-	-	-	87	136	210	295	-	-	-	
30	22	-	-	-	-	-	75	117	181	246	-	-	-	
40	30	-	-	-	-	-	-	110	180	235	-	-	-	

Cable sizing

Water filled motors 4" - 6" - 8"

Example: Motor 0.75 kW - 230V single phase - cable length 73 m = 4x2.5 mm²

Motor	HP	kW	Cable type																						
			4x1	4x1.5	4x2.5	4x4	4x6	4x10	4x16	4x25	4x35	4x50	4x70	4x95	4x120	4x150	4x185	4x240	4x300	4x400					
Type 4" Single phase 230V	0.5	0.37	50	76	126	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	0.75	0.55	39	58	97	155	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	1	0.75	29	44	73	117	175	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	1.5	1.1	20	30	50	79	119	198	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	2	1.5	-	23	39	62	93	156	249	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3	2.2	-	-	28	45	68	113	181	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Type 4" Three phase 400V	0.5	0.37	325	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	0.75	0.55	223	335	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	1	0.75	167	251	418	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	1.5	1.1	120	179	299	478	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	2	1.5	86	129	215	343	515	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	3	2.2	61	91	152	243	365	609	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Type 6" Three phase 400V	4	3	45	67	112	179	268	446	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	5.5	4	34	51	85	135	203	338	541	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	7.5	5.5	40	66	106	159	266	425	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	10	7.5	-	78	117	196	313	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	5.5	4	40	60	100	161	242	404	646	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	7.5	5.5	45	75	120	180	300	481	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Type 8" Three phase 400V	10	7.5	-	60	96	138	228	354	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	12.5	9.2	-	48	77	120	192	306	468	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	15	11	-	-	66	102	162	258	396	525	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	20	15	-	-	72	126	192	294	402	546	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	25	18.5	-	-	60	102	156	240	330	438	576	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	30	22	-	-	84	132	204	276	372	489	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
50	37	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Type 8" Three phase 400V	60	45	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	75	55	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	100	75	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	125	93	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	150	110	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	150	110	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

A driver for your system

Pressure or temperature variations, as well as the variation in the demand for water itself, are situations that commonly occur in water systems, whether they are civil pressurisation systems or related to irrigation or industrial uses.

Responding promptly to these variations by linking the operation of the pressurization group to these events means **improving the efficiency and reliability** of the entire system.

To do this, different types of inverters are available that offer different modes of operation of the group ensuring optimal operation.

The available options are: **E-SPD** and **E-drive**.

E-SPD

E-SPD is the new inverter introduced by EBARA, with air cooling, to be installed directly on terminal box of the EBARA motors, it has all the characteristics to satisfy all customer needs.



Easy: E-SPD is easy and intuitive, with terminal box mounting and easy connection, along with the easy to use start up wizard to save time.



Flexibility: E-SPD can be adapted to EBARA centrifugal pumps including both horizontal and vertical



Versatility: E-SPD can be either mounted directly on the terminal box of ETM or EBARA branded motors, or wall mounted with the optional wall bracket



Visibility: E-SPD has a large LCD display that can indicate important performance data, system parameters and alarm notifications.



Safety: E-SPD provides both protection for the motor and the pump preventing common problems like overcurrent, overheating, voltage protection, dry running and water leaks.



Connectivity: E-SPD can offer multiple connections with 2 digital inputs and outputs as standard, along with 1 analogue input and dedicated communication port for linking up to 8 inverters for multiple pump systems.

EZ-finder, more than just a simple selector

EZ-finder, a way to look for a model of electric pump?? **Much more.**

It is the ultimate tool to find and select the right product for your needs.

Thanks to the logic of the selector, it is possible to search for a product in **various ways**: according to the duty point, by entering the model name or by selecting the application type. **Simple**, the right product in seconds.

EZ-finder is the **ideal tool** available to the installer, the designer or the engineer.

Discover it at the link <https://ezfinder.ebara.com>



Everything you need just a click away

visit our website www.ebara.eu



Data book

Complete technical documentation to be consulted to obtain all the data related to the pumps



Instruction manual

The manual with all the information needed for correct installation of our pumps



Kensaku

a system for the selection of spare parts



Ez-finder

The correct pump selection software for every need
<https://ezfinder.ebara.com>



Service

A team of professionals at your disposal to advise you in your choice of pump and to offer post sale assistance

EBARA sales network

EUROPE

EBARA Pumps Europe S.p.A.
Via Ison di Comine 271 int. C
10055 G. G. (Cuneo), Italy
Phone +39 0444 708811
Fax +39 0444 405811
www.ebara.eu
Italian Sales (for order only):
e-mail: ordini@ebara.eu
Export Sales (for order only):
e-mail: exportsales@ebara.eu
Technical Customer Service (TCS):
e-mail: tes@ebara.eu
Phone +39 0444 708859/902/923/833

EBARA Pumps Europe S.p.A. GERMANY

Elisabeth-Seibert-Strasse 2
63110 Rodgau, Germany
Phone +49 (0) 6106-660 99-0
Fax +49 (0) 6106-660 99-45
e-mail: info@ebara.de

EBARA Pumps Europe S.p.A. UNITED KINGDOM

Unit A, Park 34
Collett Way - Didcot
Oxfordshire - OX11 7WB, United Kingdom
Phone +44 1895 439027 - Fax +44 1235 815770
e-mail: info@ebara.co.uk

EBARA Pumps Europe S.p.A. FRANCE

122, Rue Pasteur
69780 Toussieu, France
Phone +33 4 72 769492
Fax +33 905 101071
e-mail: info@ebara.eu

EBARA POMPY POLSKA Sp. z o.o.

ul. Działkowa 115 A
02-234 Warszawa, Poland
Phone +48 22 3909920
Fax +48 22 3909929
e-mail: info@ebara.eu

EBARA Pumps RUS Ltd.

Prospekt Andropov, 18, building 7, floor 11
115432 Moscow
Phone +7 499 8800133
e-mail: info@ebara.eu

EBARA PUMPS IBERIA S.A.

Poligono Ind. La Estación
C/Comaranes 6-8
28320 Pinto (Madrid), Spain
Phone +34 916 932 630
Fax +34 916 910 818
e-mail: marketing@ebara.es

MIDDLE EAST

EBARA Pumps Middle East FZE

P.O. BOX 61383
Jebel Ali, Dubai, UAE
Phone +971 4 88589
Fax +971 4 88589
e-mail: info@ebara.ae

EBARA PUMPS SAUDI ARABIA LLC

Stt. 98, Dammam Second Industrial City, P.O. Box. 9210,
Dammam 34333, Kingdom of Saudi Arabia
Phone 966-138022014

ASIA & SOUTHEAST ASIA

EBARA Corporation
1-1-1, Higashi, Ohta-ku,
Tokyo 144-8510, Japan
Phone +81 3 3743-6111
Fax +81 3 3759 3100
www.ebara.co.jp

EBARA Corporation Fujisawa plant

1-1-1, Higashi, Ohta-ku,
Kanagawa 251-8502, Japan
Phone +81-466-83-8111
Fax +81-466-81-2164

EBARA Machinery (CHINA) CO., Ltd.

Room No.303, Beijing Fortune Plaza,
100020 P.R. China
Beijing, 100020 P.R. China
Phone 86-10-65309996
Fax 86-10-6530-8968
www.ebara.cn

EBARA Densan (Singapore) Technology Co., Ltd.

No.88, Mangata Road, Changyang, Singapore
Phone +65 632-8682-5379
Fax +65 632-8682-5379
www.edq-ebara.com

EBARA Densan Taiwan Manufacturing Co., Ltd.

No.7, Nan-Yuen 2nd Road, Chung LI City,
Tai Yuan Hsien, Taiwan
Phone +886-2-216-4381
Fax +886-2-452-7804
www.ebara.com.tw

EBARA Thailand Limited

3rd Floor Achime Build, 125 Petchburi Road
Tungphayathai, Rajbhivee, Bangkok 10400, Thailand
Phone +66 2 216-4383
Fax +66 2 216-4383
e-mail: info@ebara.co.th

EBARA Fluid Machinery Korea Co., Ltd.

3rd Fl, Hyun-Saek Tower, 50,
Seongju-ro, Gyeongsang-Gu
Seoul, 135-513 Korea, Gyeongnam-Gu
Phone 82 70 43821100
Fax 82 70 82302030
e-mail: marketing@efmk-ebara.com

EBARA Pumps Philippines, Inc.

Caluyop 4025, Laguna, Philippines
Cebu City 6003, Cebu, Philippines
Phone 0063-49-548-1915
Fax 0063-49-548-1915
www.ebaraphilippines.com

PT EBARA Indonesia

Jl. Raya Jakarta - Bogor Km. 32
Desa Curing, Cimanggis-Depok
Jawa Barat, 16953 Indonesia
Phone +62 21 671-82-55
Fax +62 21 671-4-0033
e-mail: marketing@ebaraIndonesia.com
www.ebaraIndonesia.com

EBARA Pumps Malaysia Sdn. Bhd

6, Jalan P3, UEP Subang Jaya Industrial Park,
47600 Subang, Selangor, Malaysia.
Phone 603-8923 6622
Fax 603-8923 9855
www.ebara.com.my

EBARA Engineering Singapore Pte. Ltd.

100, Cross Street, Singapore 068550
Phone 65-6862-3536
Fax 65-6861-0589
www.ebara.com.sg

EBARA MACHINERY INDIA PRIVATE LIMITED

Plot No. 10, Main Road, Gurgaon,
Chennai 600 032, India
Phone 91-756-0089388

EBARA Vietnam Pump Company Limited
1-1-1, Higashi, Ohta-ku, Lai Cach Town,
Cam Giang District,
Hai Duong Province, Vietnam
Phone +84 2203-850180
Fax +84 2203-850180
e-mail: info@evpc.vn
www.ebarapump.com.vn/en/

AMERICA

EBARA PUMPS AMERICAS CORPORATION

1651 Cedar Line Drive
Rockhill, South Carolina 29730 U.S.A.
Phone 803 327-5005
Fax 803 327-5097
www.pumpsabara.com
e-mail: info@pumpsabara.com

EBARA Bombas America do Sul Ltda

Rua Joaquim Marques de Figueiredo, 2-31,
Distrito Industrial, CEP 17034-290, Bauru, SP Brasil
Phone +55 14 4009-0000
Fax +55 14 4009-0044
e-mail: assistencia@ebara.com.br
www.ebara.com.br/ebarapbr/index.php

EBARA Bombas Colombia S.A.S.

Autopista Medellín km 7 Cella Trade Park Bogotá
02 Lote 116 Funza, Republica de Colombia
Phone 57-4-826-9865

AFRICA

EBARA PUMPS SOUTH AFRICA (PTY) LTD

26 Kyalami Boulevard, Kyalami Business Park,
1684, Midrand, Gauteng
South Africa
Phone +27 11 466 1844
Fax +27 11 466 1833

OCEANIA

EBARA Pumps Australia Pty. Ltd.

7, Holloway Drive
Baywater 3153 Victoria, Australia
Phone 0061-3-976 13033
Fax 0061-3-976 13044
www.ebara.com.au
sales@ebara.com.au
www.ebara.com.au/index.html

DNV·GL

MANAGEMENT SYSTEM CERTIFICATE

Certificato no./Certificate No.: 164980-2014-AE-ITA-ACCREDIA Data prima emissione/Initial date: 14 ottobre 2017 - 14 ottobre 2020 Validità/Valid: 14 ottobre 2017 - 14 ottobre 2020

Si certifica che il sistema di gestione di/This is to certify that the management system of

EBARA PUMPS EUROPE S.p.A.

Sede Legale: Via Campo Sportivo, 30 - 38023 Cles (TN) - Italy
e i siti come elencati nell'Appendix che accompagna questo certificato / and the sites as mentioned in the appendix accompanying this certificate

È conforme ai requisiti della norma per il Sistema di Gestione Ambientale/
Has been found to conform to the Environmental Management System standard:
ISO 14001:2015

Valutato secondo le prescrizioni del Regolamento Tecnico RT-09/
Evaluated according to the requirements of Technical Regulations RT-09

Questa certificazione è valida
per il seguente campo applicativo:

Progettazione e produzione di pompe e sistemi di pompaggio attraverso le fasi di stampaggio plastica, taglio lamiera e colli, stampaggio lamiera, saldatura, tornitura e fresatura, lavaggio, passivazione, lucidatura, verniciatura, avvolgimento di motori elettrici, assemblaggio e collaudo
(EA 18, 17, 14)

This certificate is valid
for the following scope:

Design, and manufacturing of pumps and pumping systems by means of plastic moulding, metal cutting and shearing, metal stamping, welding, machining and milling, clamping, passivation, polishing, painting, electrical motors winding, assembly and testing
(EA 18, 17, 14)

Luogo e Data/Place and date:
Vimercate (MB), 24 maggio 2018



Per l'Organismo di Certificazione/
For the Certification Body
DNV GL - Business Assurance
(MB) - Italy



ACCREDIA
SOCIETÀ PER AZIONI
Sede in Roma, Via
Cavour, 154 - 00194 Roma, Italia
Prestazioni di servizi di certificazione
per il sistema di gestione di qualità
e per il sistema di gestione ambientale
Sede in Milano, Via
Cavour, 154 - 20122 Milano, Italia
Prestazioni di servizi di certificazione
per il sistema di gestione di qualità
e per il sistema di gestione ambientale

Zeno Beltrami
Management Representative

La validità del presente Certificato è subordinata al rispetto delle condizioni contenute nel Contratto di Certificazione/
Lack of fulfillment of conditions as set out in the Certification Agreement may render this Certificate invalid.
DNV GL Business Assurance Italia S.p.A., Via Energy Park, 14 - 20871 Vimercate (MB) - Italy - TEL. 039 68 99 905 - www.dnvgit.it

DNV·GL

MANAGEMENT SYSTEM CERTIFICATE

Certificato no./Certificate No.: CER1-17819-2006-AQ-VEL-SINCERT Data prima emissione/Initial date: 13 ottobre 2006 Validità/Valid: 10 ottobre 2018 - 10 ottobre 2021

Si certifica che il sistema di gestione di/This is to certify that the management system of

EBARA PUMPS EUROPE S.p.A.

Sede Legale: Via Campo Sportivo, 30 - 38023 Cles (TN) - Italy
e i siti come elencati nell'Appendix che accompagna questo certificato / and the sites as mentioned in the appendix accompanying this certificate

È conforme ai requisiti della norma per il Sistema di Gestione Qualità/
has been found to conform to the Quality Management System standard:
ISO 9001:2015

Questa certificazione è valida
per il seguente campo applicativo:

Progettazione, produzione, vendita e commercializzazione di pompe e sistemi di pompaggio
(EA: 18, 17, 14)

This certificate is valid
for the following scope:

Design, manufacture, sales and trade of pumps and pumping systems
(EA: 18, 17, 14)

Luogo e Data/Place and date:
Vimercate (MB), 03 ottobre 2018



Per l'Organismo di Certificazione/
For the Certification Body
DNV GL - Business Assurance
(MB) - Italy



ACCREDIA
SOCIETÀ PER AZIONI
Sede in Roma, Via
Cavour, 154 - 00194 Roma, Italia
Prestazioni di servizi di certificazione
per il sistema di gestione di qualità
e per il sistema di gestione ambientale
Sede in Milano, Via
Cavour, 154 - 20122 Milano, Italia
Prestazioni di servizi di certificazione
per il sistema di gestione di qualità
e per il sistema di gestione ambientale

Zeno Beltrami
Management Representative

La validità del presente Certificato è subordinata al rispetto delle condizioni contenute nel Contratto di Certificazione/
Lack of fulfillment of conditions as set out in the Certification Agreement may render this Certificate invalid.
DNV GL Business Assurance Italia S.p.A., Via Energy Park, 14 - 20871 Vimercate (MB) - Italy - TEL. 039 68 99 905 - www.dnvgit.it



www.ebara-europe.com

Looking ahead,
going beyond expectations
Ahead  *Beyond*



EBARA Pumps Europe S.p.A.

Via Torri di Confine 2/1 int. C
36053 Gambellara (Vicenza), Italy
Phone +39 0444 706811
Fax +39 0444 405811
ebara_pumps@ebaraeurope.com
www.ebaraeurope.com

EBARA Corporation

11-1, Haneda Asahi-cho, Ota-ku,
Tokyo 144-8510
Japan
Phone +81 3 6275 7598
Fax +81 3 5736 3193
www.ebara.com

